


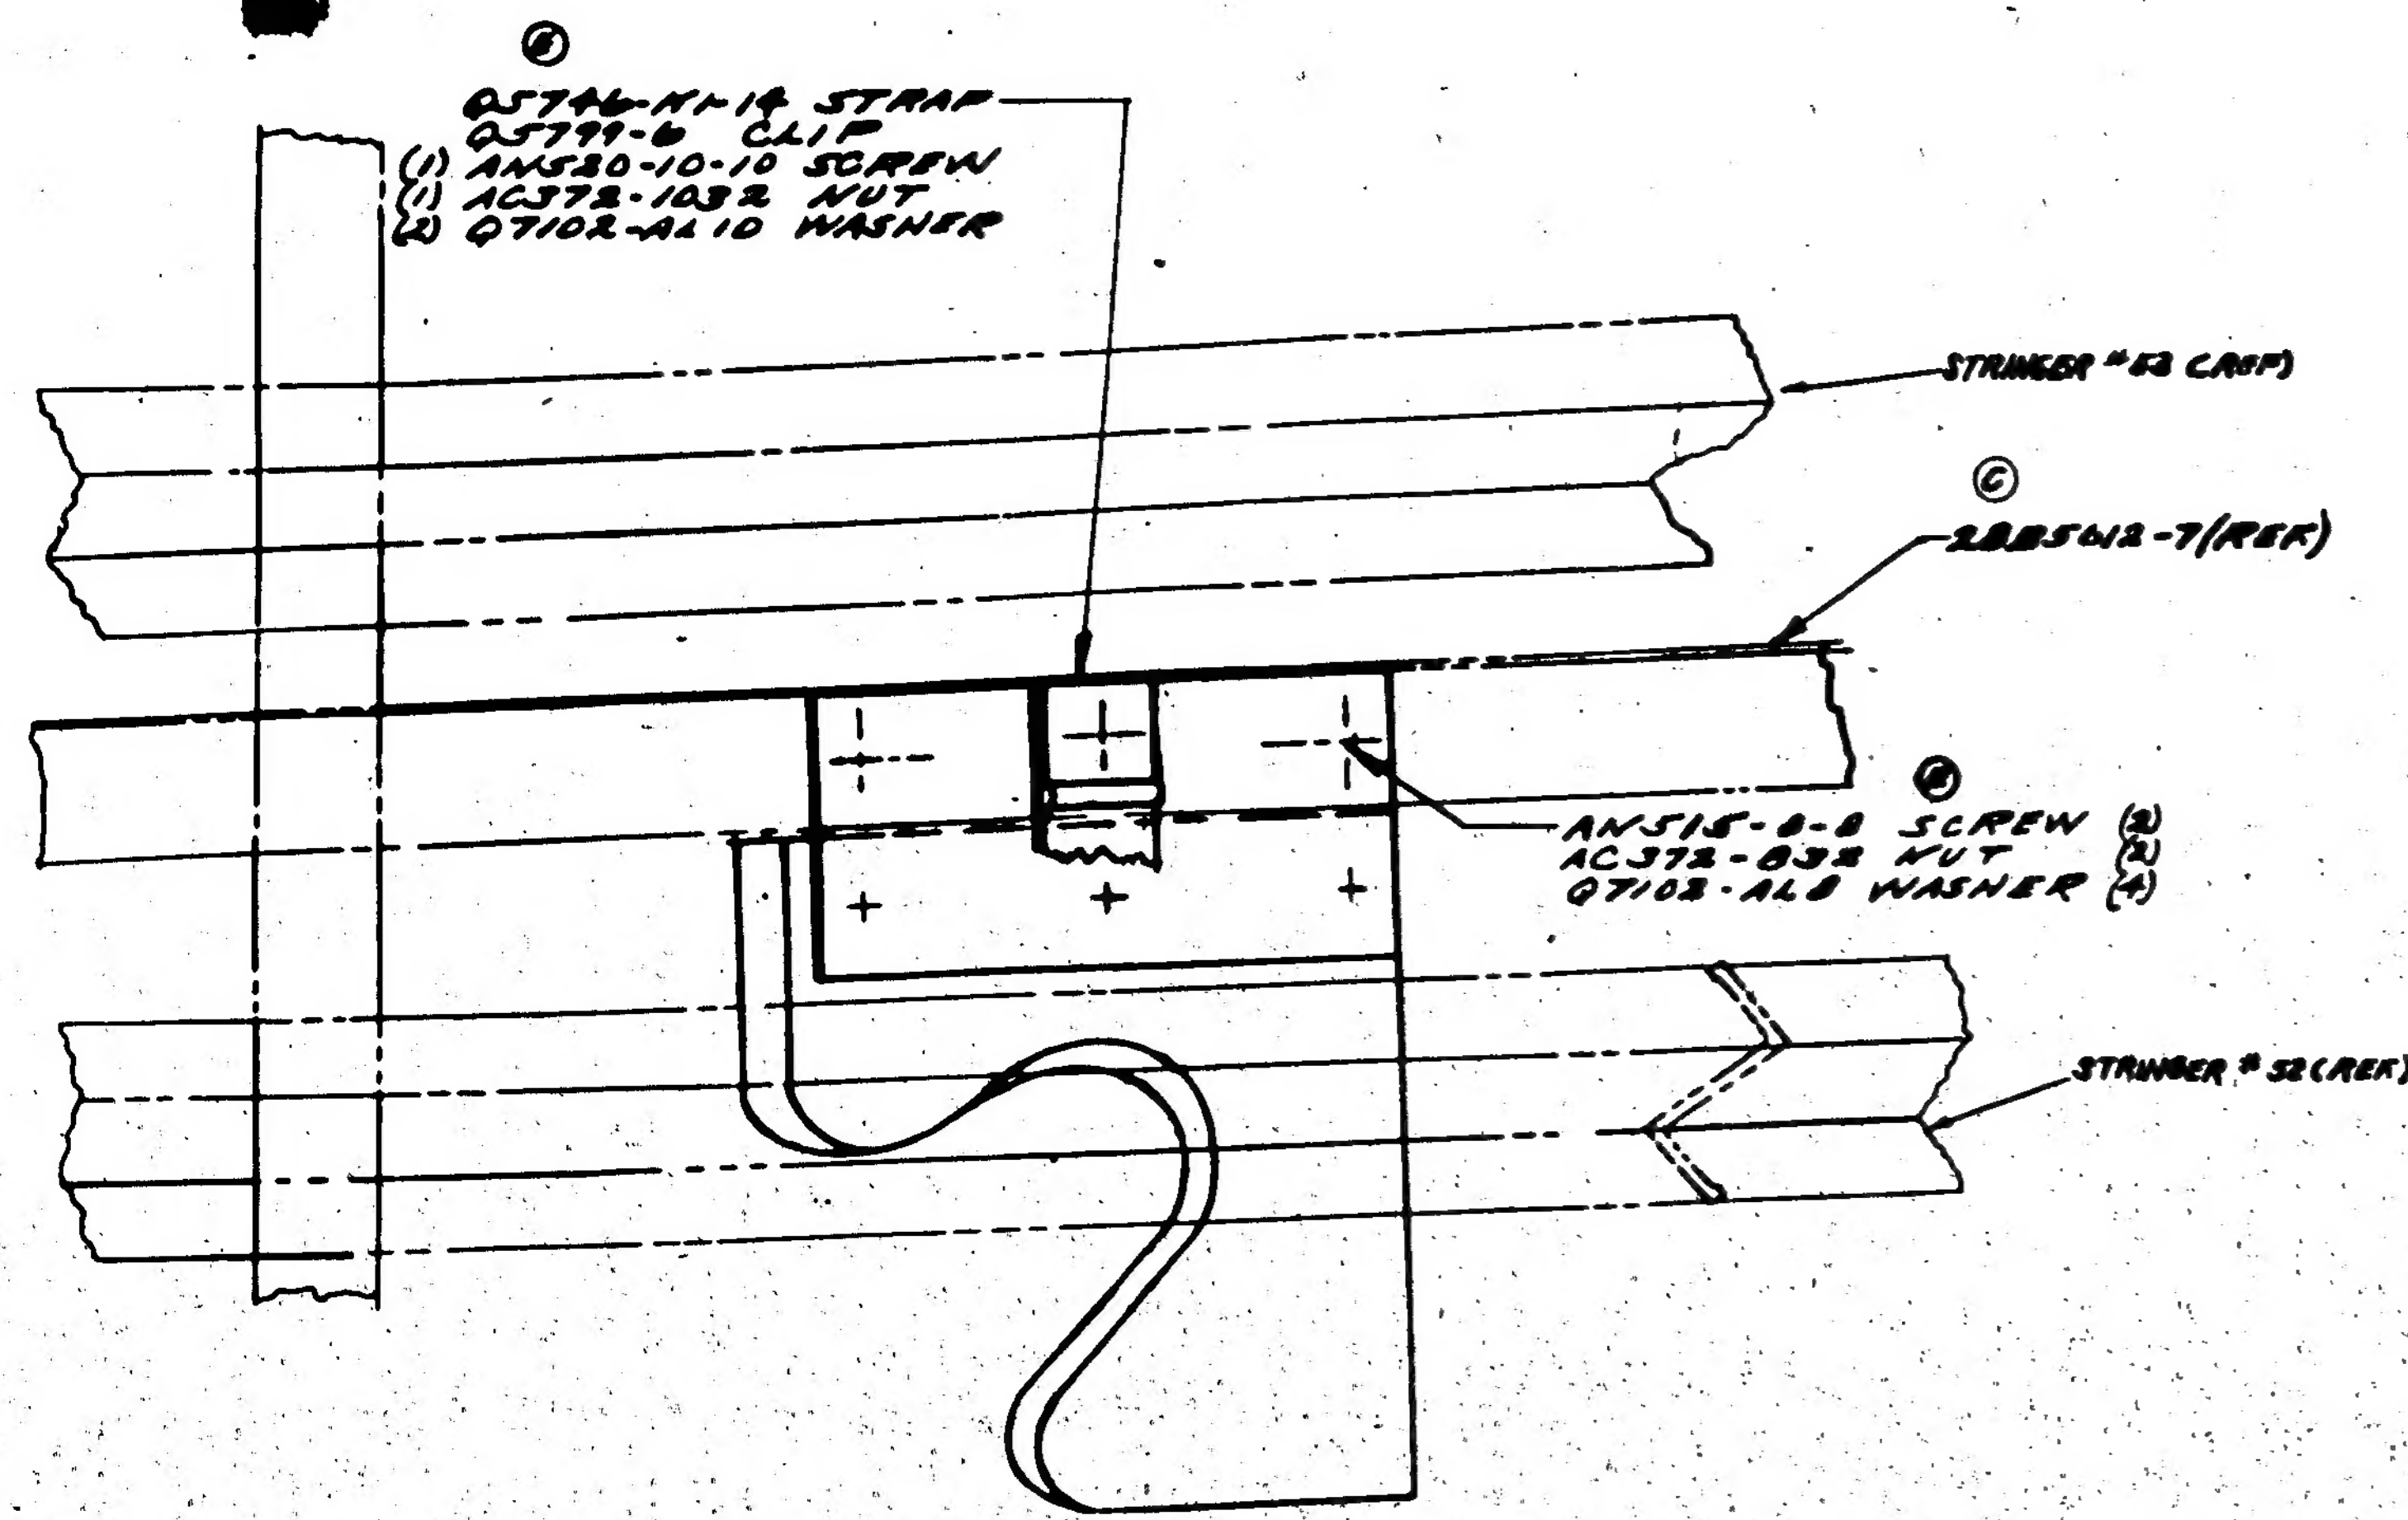


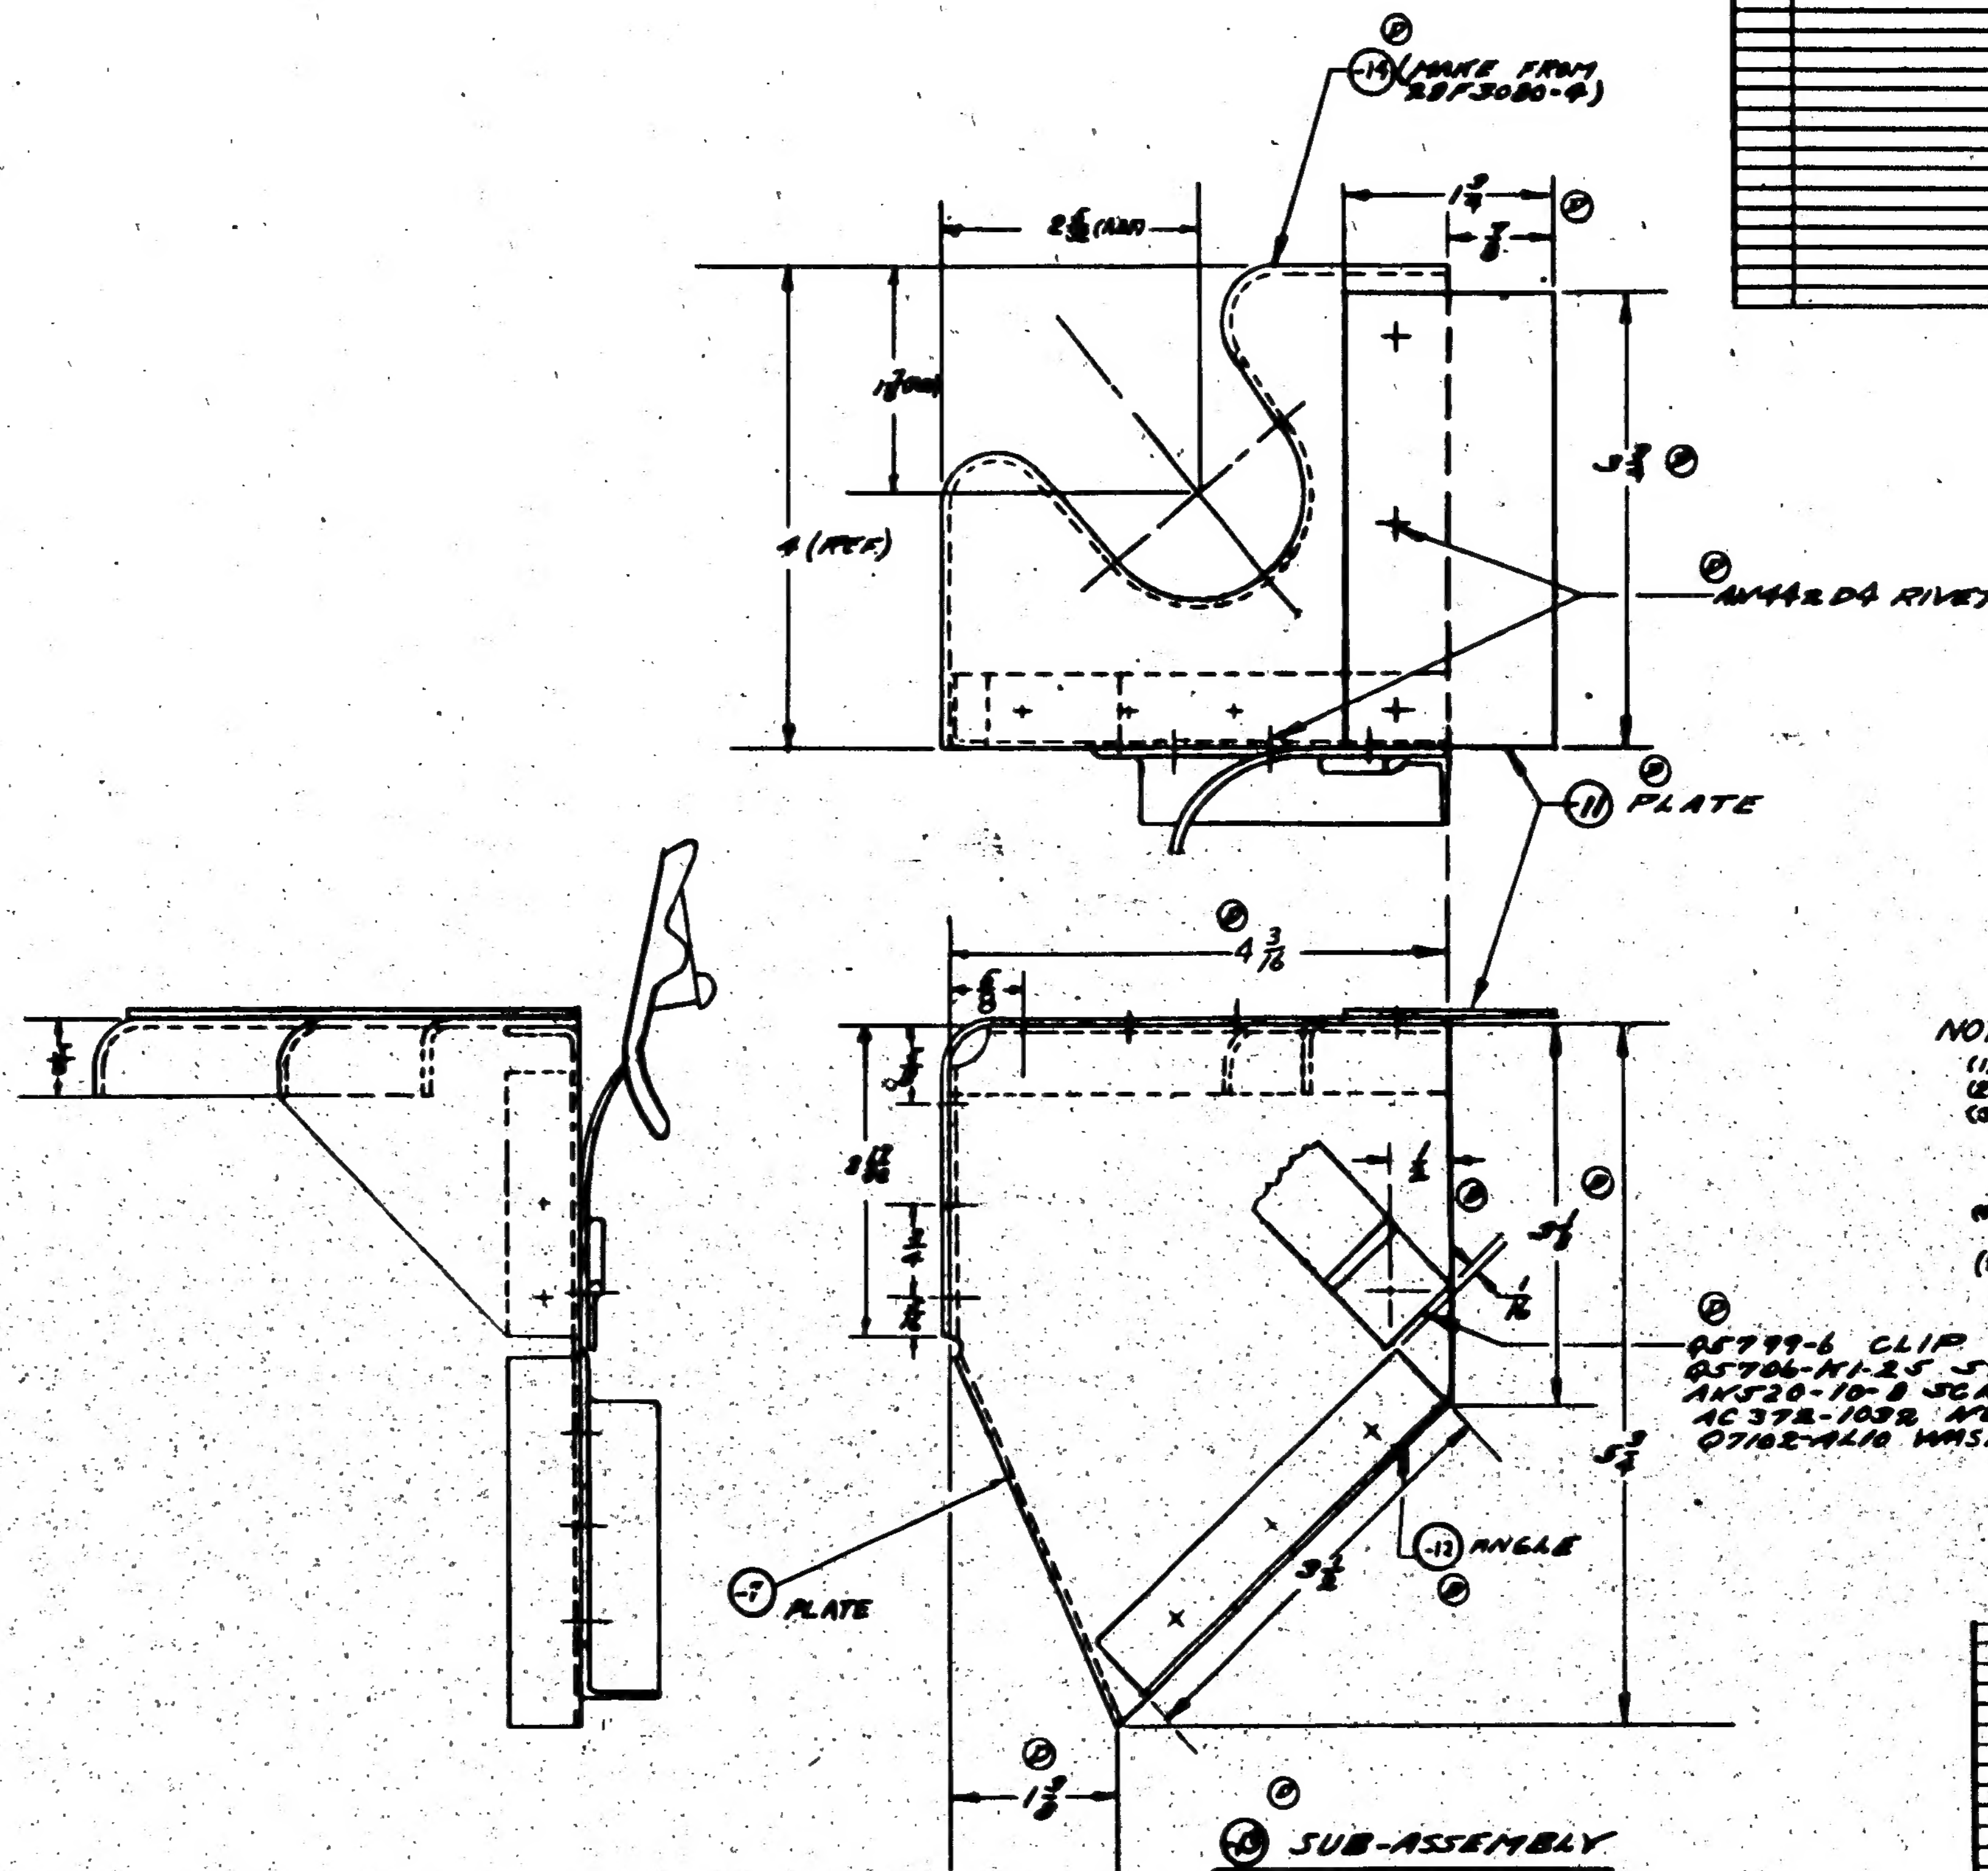

NOTES ~
(1) MIN. EDGE DISTANCE OF ALL AN442-D4 RIVETS 5/16
(2) MAKE INSTALLATION WITH GUN IN PLACE
(3) LOCATE THIS SOCKET SO THAT GUN IS SPRUNG INTO STOWAGE POSITION, SUCH THAT REVOLVING CIRCULAR CIRCULAR WINDSHIELD IS FORCED AGAINST STOP ON GUN TRACK.
(4) ALL RIVETS AN442-D4 DRILL #30 (.128) EXCEPT AS NOTED.
(5) 1/8 BEND RADII EXCEPT AS OTHERWISE NOTED.

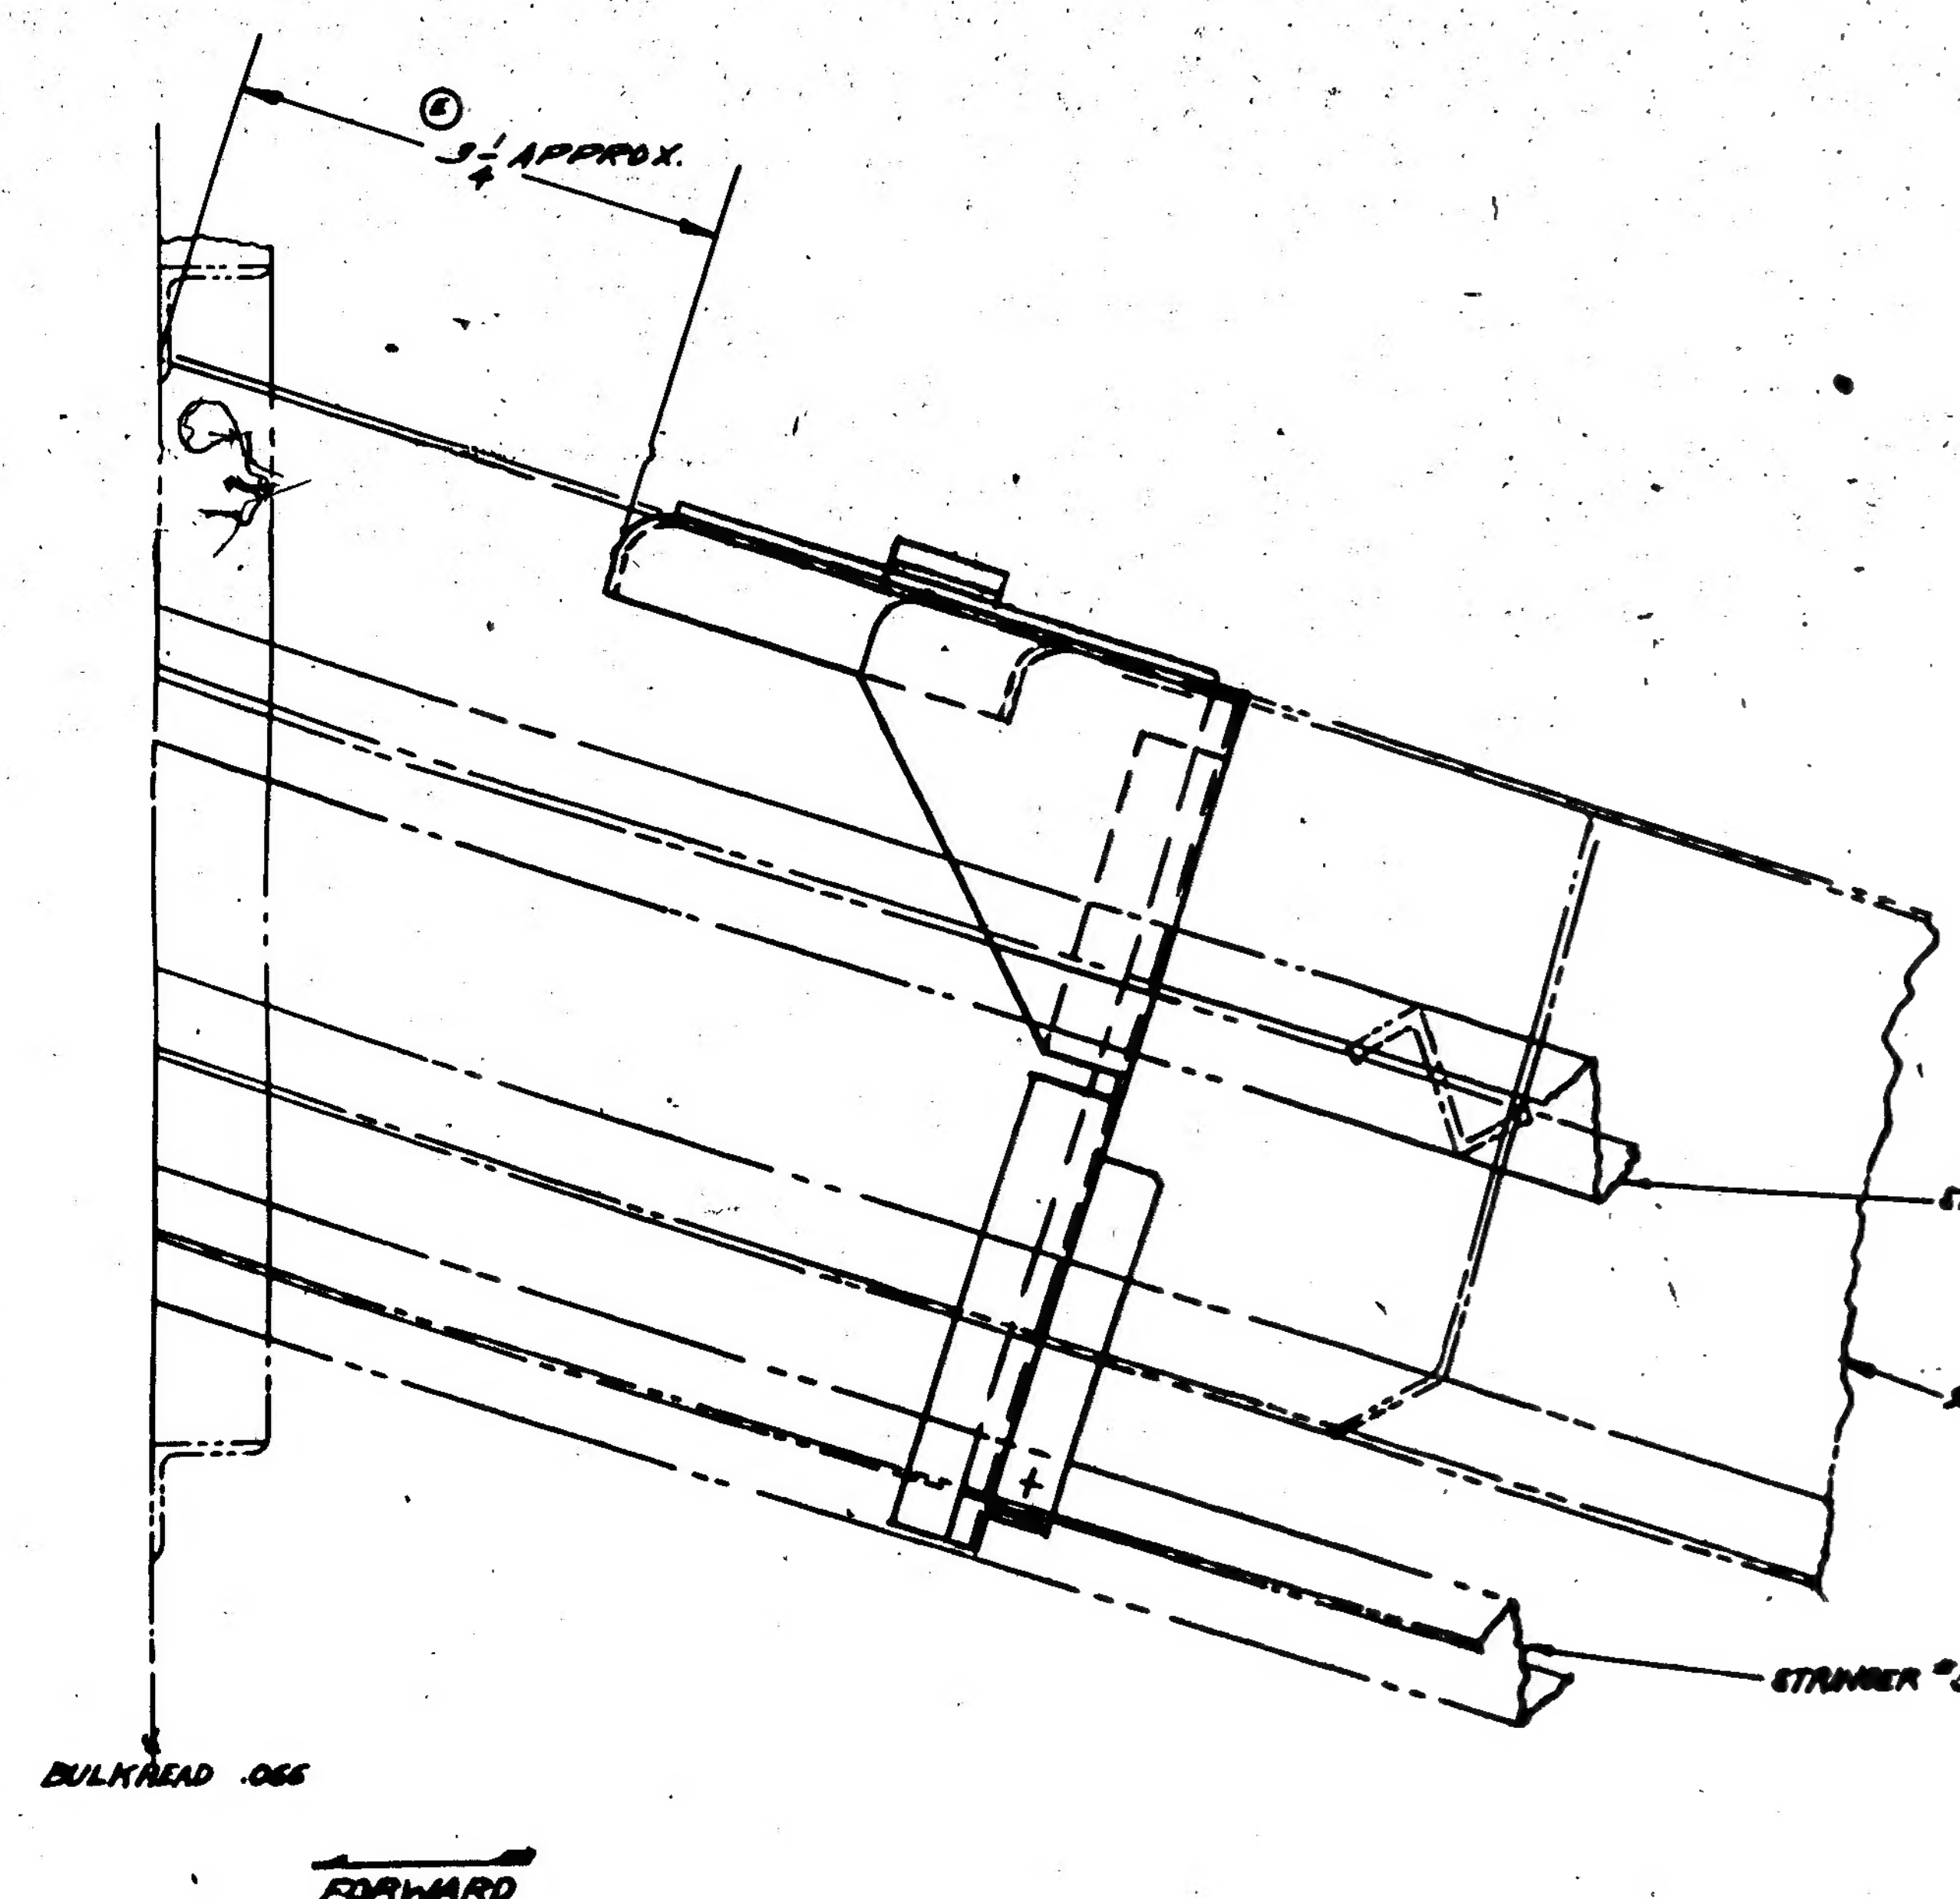

SIDE VIEW OF INSTALLATION LOOKING TO STARBOARD

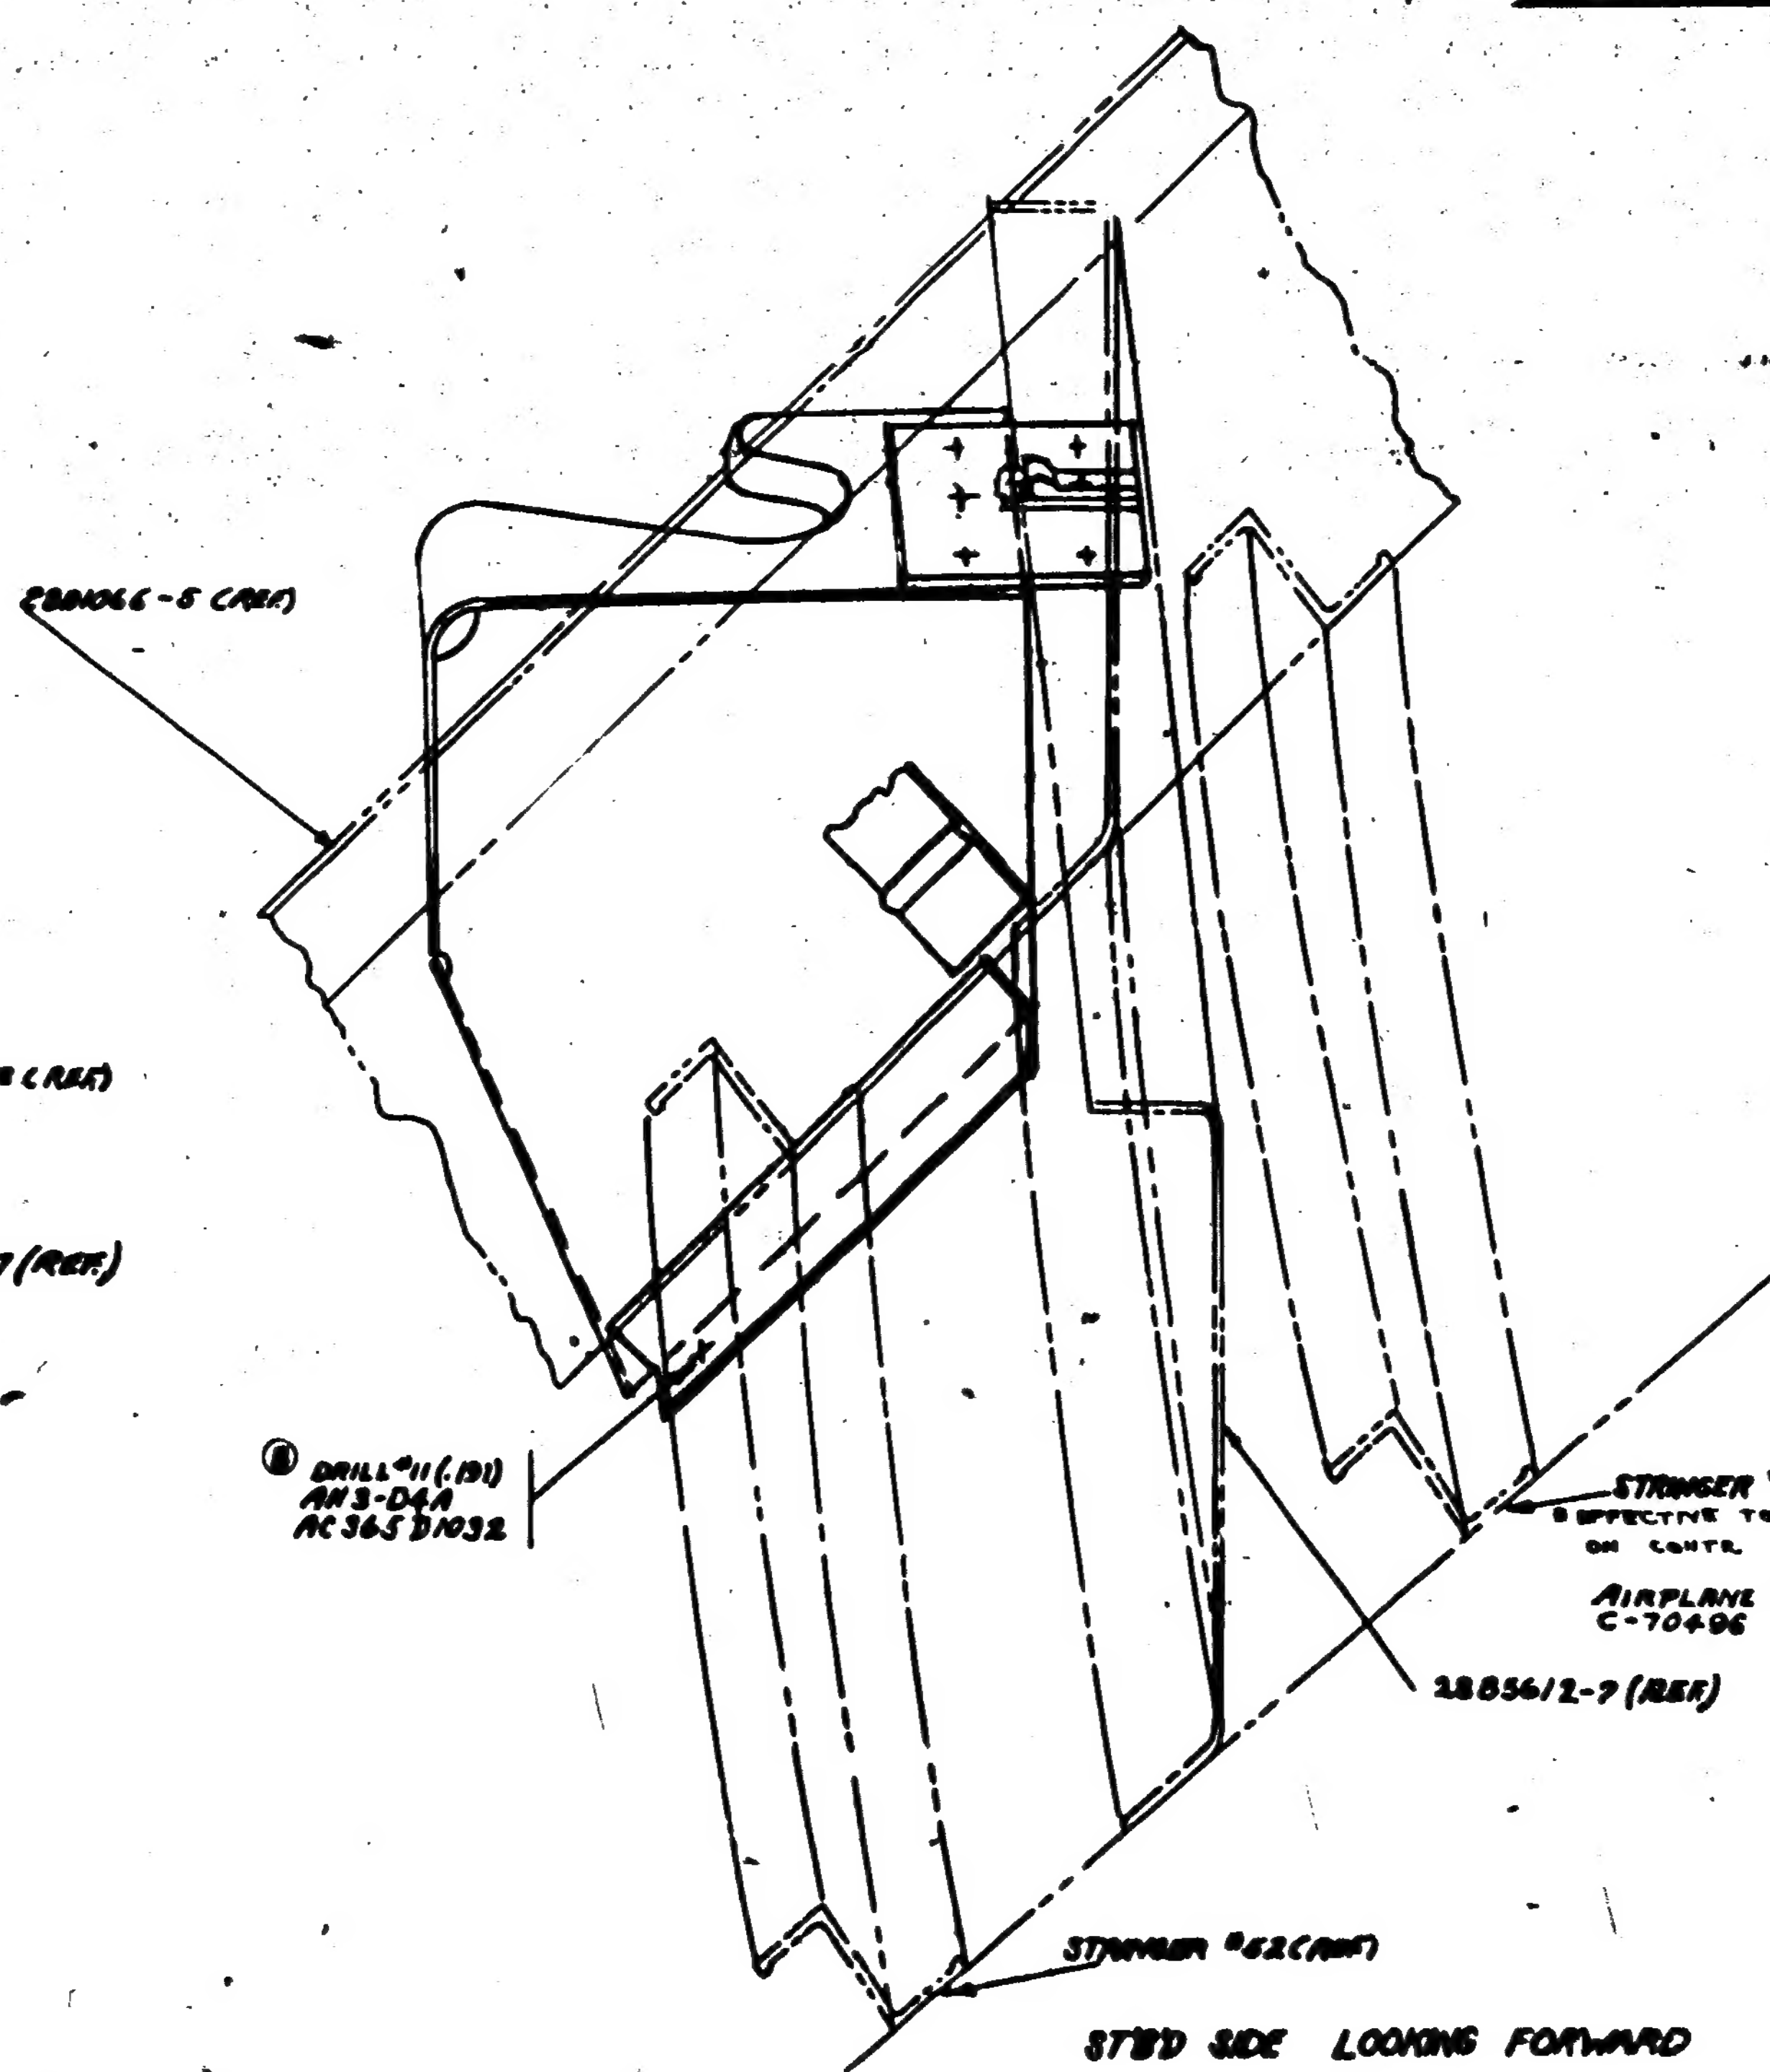

STB'D SIDE LOOKING FORWARD

CHANGE "C" RUSH RELEASED 10-30-41

GP-GREEN PRIME

FINISH CODE	
Z	ANODIC TREATMENT
P	P-27 PRIMER
AP	ALUMINIZED PRIMER
C	CADMIUM PLATE

DASH NO.	MODEL	NEXT ASSY	REQ.
-2	PBY-5A	28F6002	7
-4	PBY-5A	28F6002	7

SCALE 1/2" = 1'-0"

PART NO.	STOCK	MATERIAL	SPEC.
AN442-D4			
-7			
-14	MAKE FROM 28F3080-4		
Q5706-K1-2.5			
Q5799-6			
Q7102-AL10			
AC372-1032			
AN520-10-8			
-12	K13624-3/4	EXTR. ALLOY	[illegible]
-11	[illegible] .064	ALCLAD	[illegible]
SUB. ASS'Y -13			
AN442-D4			
28F3080-4			
-7	.040"	ALUM. SHEET	47A10-T
-6 SUB. ASS'Y			
Q7102-AL8			
AC372-832			
AN515-8-8			
AN520-10-10			
Q5799-6			
Q5706-K1-14			
[illegible]			
[illegible]			
[illegible]			
[illegible]			
[illegible]			
-10	[illegible]		
-9	.064"	ALUM. SHEET	[illegible]
-13 SUB. ASS'Y			
-6 SUB. ASS'Y			

PARTS LIST PER ASSY.

A.C.
NAVY NONE

NAME HOOK-INSTALLATION BOW GUN STOWAGE

J 28F4138

CONSOLIDATED AIRCRAFT CORP. San Diego, Calif.

H 311